

Durable Design


- Stainless steel interior & exterior
- Coated evaporator coil
- 3 height adjustable, heavy duty, PE coated wire shelves
- LED interior lighting
- Digital temperature display
- Door lock with keys
- Simple plug-in installation
- Oversized bottom mount compressor section
- Door swing is field reversible with kit # KB-BLHK

Energy Efficiency

- Self-closing door with stay open feature
- Seals tight with magnetic vinyl gasket
- Open door alert beeps when door has been open for 3 minutes.
- Foamed-in place high-density polyurethane insulated body, CFC-free
- Large evaporator & condenser for quick cooling and greater efficiency
- Bottom mount compressor provides energy savings and ease of service.

Superior Quality

- Designed for mobility, reliability & efficiency in commercial kitchens
- Certified with ETL & Energy Star guaranteeing quality standards and energy efficiency.
- 4" swivel castors with 2 front brakes
- Easy grip handle
- Entirely self-contained system
- Automatic defrost system
- Digitally controlled temperature system
- Accommodates full-size bun sheet pans
- Easily adjustable shelf height
- Internal storage capacity is 18.9 cu. ft.
- Refrigerators: NEMA 5-15 plug, Freezers: L14-20P
- Compressor : Refrigerator 3/4 HP / Freezer 1-1/2 HP
- Holding temperature: Refrigerator 33°F to 39°F / Freezer 5°F to -9.4°F



Triple Door Series Refrigerator & Freezer Bottom Mount Compressor **KBSR-3 / KBSF-3**



Project Name:	
Location:	
Item:	Qty:
Model:	



5659 Royalmount Ave.

Montreal, QC, Canada H4P 2P9

Telephone: 514.737.9701 / Toll Free: 888.275.4538

Fax: 514.342.3854 / Toll Free: 877.453.8832

sales@mvpgroupcorp.com / mvpgroupcorp.com

12000 Biscayne Blvd., Suite # 108


Miami, FL, United States 33181

Telephone: 786.600.4687 / Toll Free: 844.218.8477

Fax: 786.661.4100



Technical Drawings KBSR-3 & KBSF-3

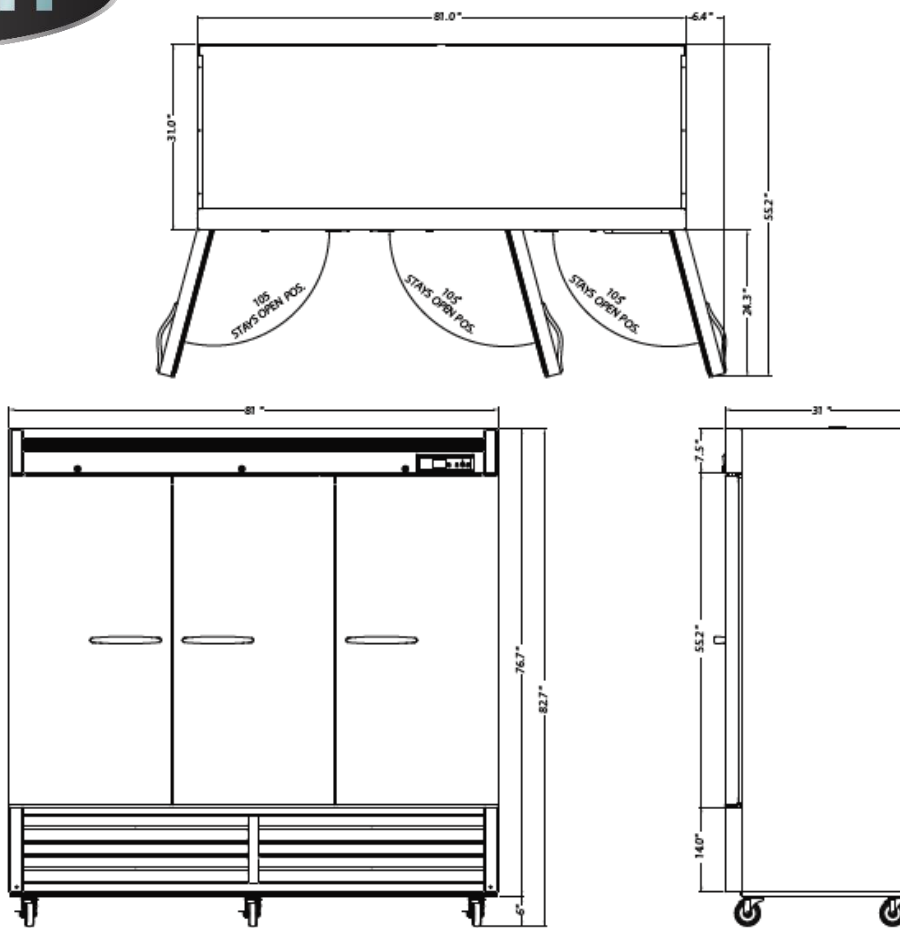

Model Number	Description	# of Shelves	Capacity (cubic ft)	External Dimensions w/handle (W x D x H in)	Internal Dimensions (W x D x H in)	Compressor Size	Voltage / Frequency	Amps	Working Temp	Refrigerant	Ship Weight (lbs)
KBSR-3	Bottom Mount Triple Door Refrigerator	9	66.7	81 x 32.75 x 82.7	77.2 x 24.25 x 53.8	3/4	115V 60 HZ	5.5	33°F to 39°F	R134a	640
KBSF-3	Bottom Mount Double Door Freezer	6	66.0	81 x 32.75 x 82.7	77.2 x 24.25 x 53.8	1-1/2	115/208-230V 60 HZ	9.2	5°F to -9.4°F	R404a	656

These units are designed for maximum performance in an air-conditioned area of 75°F ambient temperature and 55% relative humidity. There must be adequate ventilation at the top, sides & rear of the unit for proper operation.



NEMA
5-15P
KBSR-3



NEMA
L14-20P
KBSF-3

Warranty: 36 months parts & labor.
Additional 24 months on compressor (parts only).

Kool-it is a registered trademark of MVP Group.
Specifications subject to change without notice.



5659 Royalmount Ave.
Montreal, QC, Canada H4P 2P9
Telephone: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832
sales@mvpgroupcorp.com / mvpgroupcorp.com

12000 Biscayne Blvd., Suite # 108
Miami, FL, United States 33181
Telephone: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100